




White Star Lighting Industry Pty Ltd
Let there be light

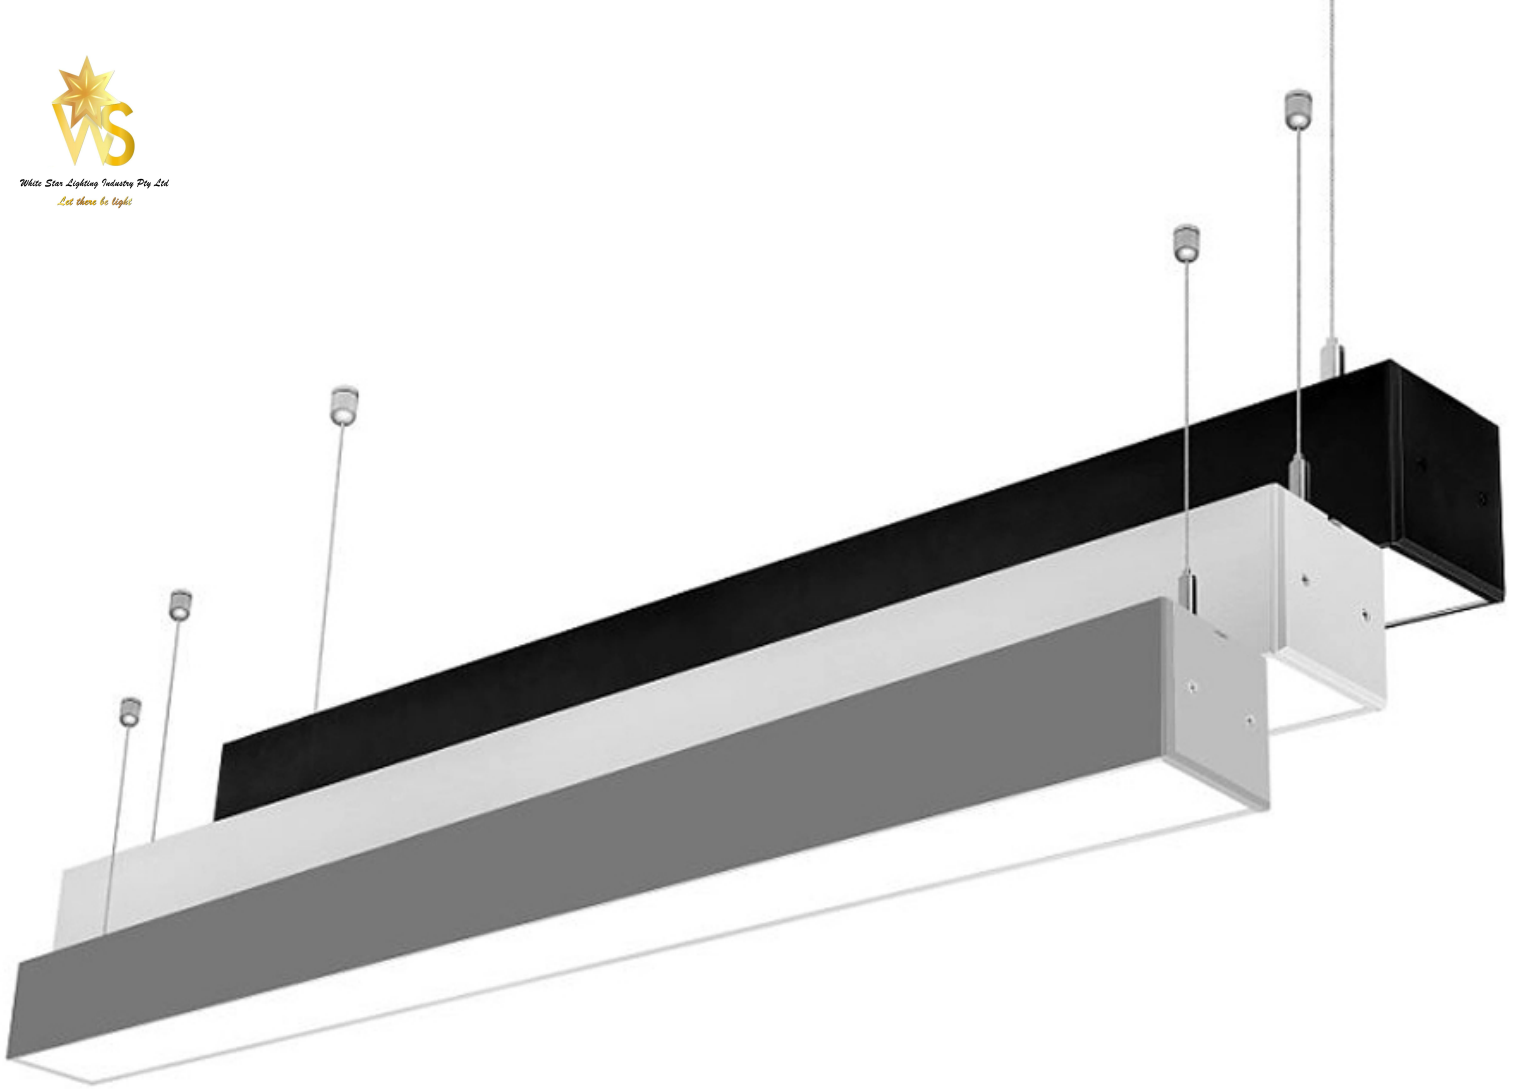

WSLI GEO LINEAR LIGHTS SERIES

Feature:

- Constant current LED driver
- 160Lm/W....@ 100 000hrs
- Suger protection 3kV

Application:


- Warehouse
- Indoor
- Office





Inner detail




Color temperature

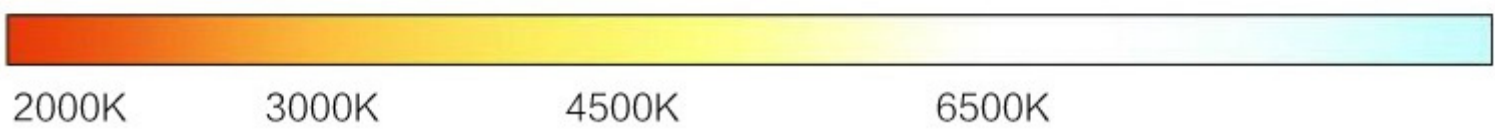

Light distribution

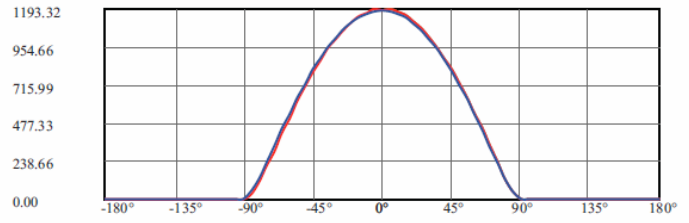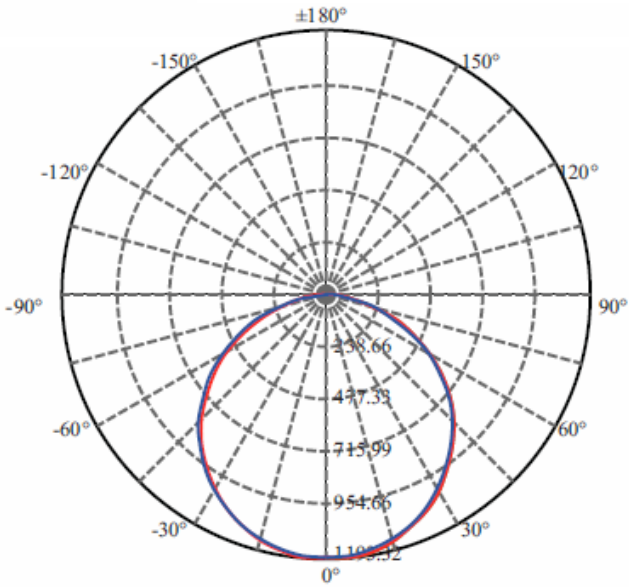

C0(Max): —
 C0/C180: —
 C90/C270: —
 Field angle(10%Imax):C0/180Left:79.5 Right:80.6
 :C90/270Left:80.8 Right:80.2
 Beam Angle(50%Imax):C0/180Left:56.1 Right:57.4
 :C90/270Left:57.5 Right:57.0

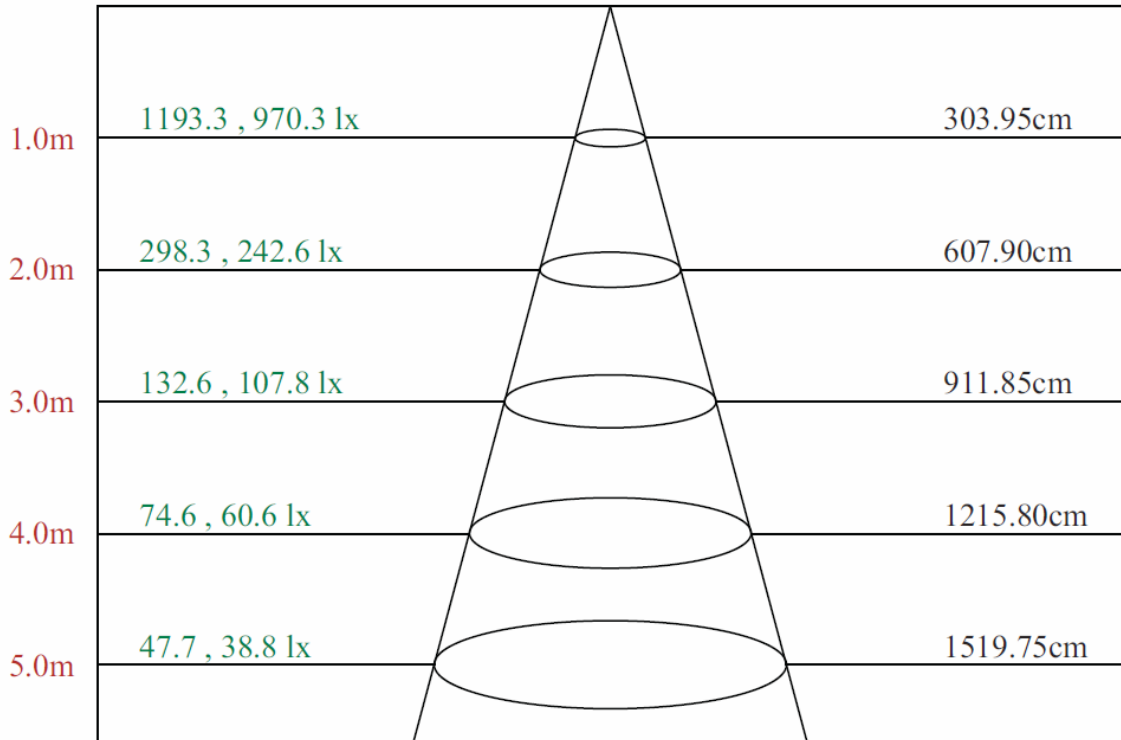

Max , Ave Beam angle of C0plane113.29

Parameter

Parameter	Tech description			
Model	WSLI GEO LINEAR LIGHTS SERIES			
LED power	35W	50W	60W	80W
Lamp size	4ft	5ft	6ft	8ft
Lamp color	Black/white/silver			
Luminous efficacy	>130lm/w			
Housing material	6063-T5			
Surface treatment	Powder coated or Brushed aluminum			
CCT	3000K,4000K,6000K			
LEDs	2835SMD (SANAN chip)			
LEDs Life Span	50,000hrs/60,000hrs			
Input Voltage	100-277V/200-240V 50/60HZ			
Power supplier	Flicker-free			
Color Render (CRI)	RA≥80 or RA≥90			
Power factory(PF)	≥0.9			
Optional features :	0-10V or DALI dimming			
IP Rated	IP20			
Beam Angle	120° (Degree Beam Angle)			
Working Temp(°C)	Surrounding Ambiance Temperature -25°~40°Degree Celsius			
Body Material	aluminum,PC,ABS			
Color Option(shell)	Silver,White,Black			
Certification	CE, RoHS			